





Zone Pressurisation test:

Each level tested as fire affected floor
Pressure differential tested between fire affected compartment (level) above & below
So nominally 20Pa differential

Stairs Test:

Final exit fully open
Activated - in fire mode
All tested compartment doors open
other stair doors 1 above & 1 below where possible
Average 1m/s through tested door fully open door portal
With all stairwell doors shut - maximum 110N door opening force
Maximum sound level in stairwell of 80dB(A)
Maximum sound level on any floor 65dB(A) at 1m from fully open door.

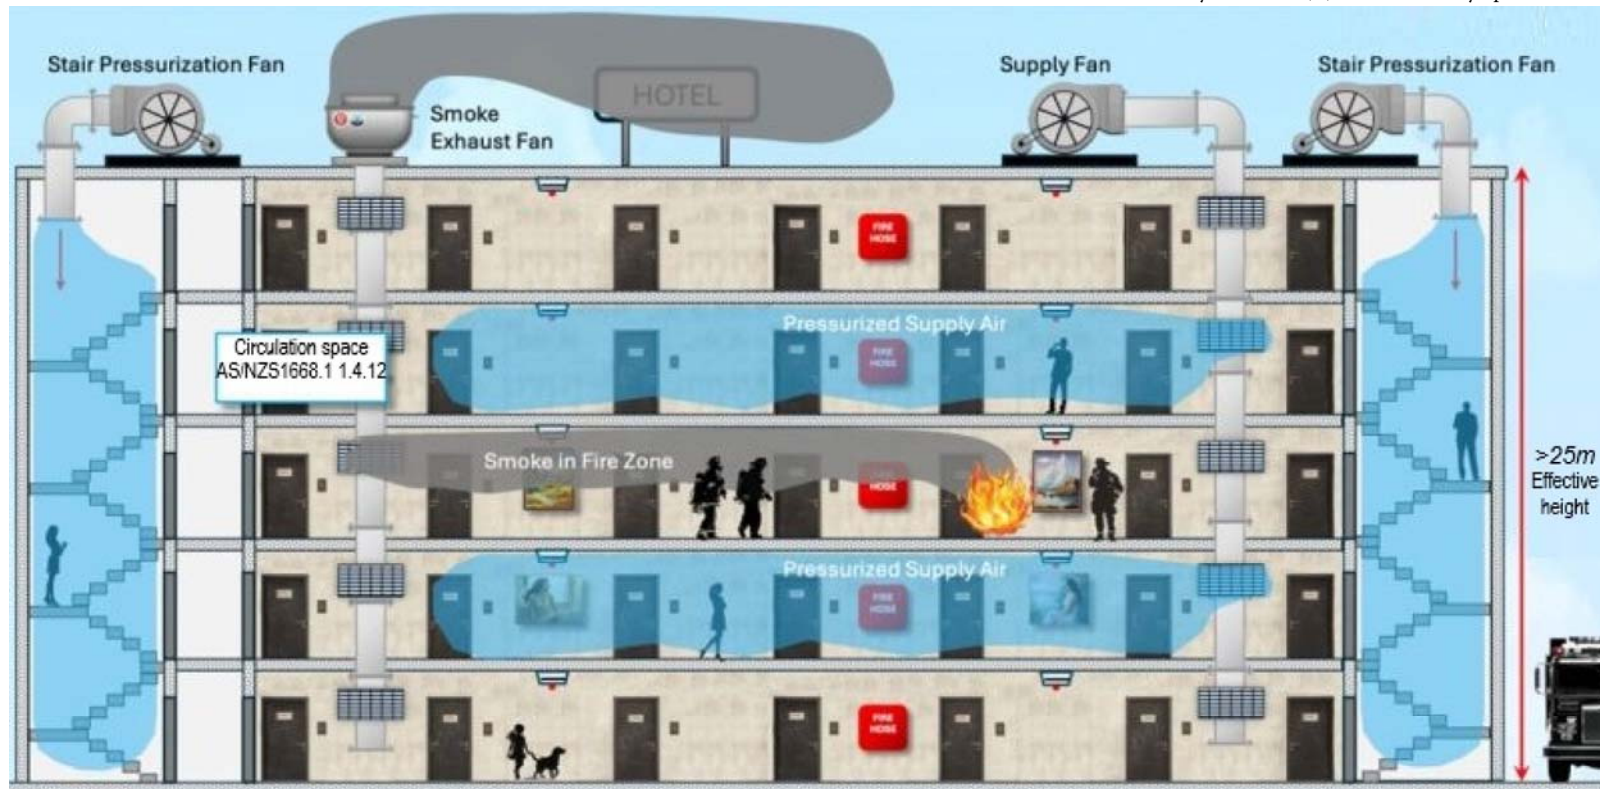

**IF YOU'RE
NOT SURE
HOW TO DO IT
DON'T DO IT...
ASK!**

Zone Smoke Control AS/NZS 1668.1:2015 Section 8
See AS1851-2012 Sect.13.4 for service & test requirements

